

# Low Pressure Thermostatic Bar Shower





## Product features:


- · Metal construction throughout
- Custom designed for lower range pressures
- · Thermostatic valve for safety & comfort
- · A modern design classic style
- Supplied with adjustable centre inlets

Packaged properties:

**Box length:** 380 mm **Box depth:** 75 mm **Box width:** 175 mm **Boxed weight:** 2.62 kg

Includes pop up waste?: No Additional comments:

#### **Product dimensions:**

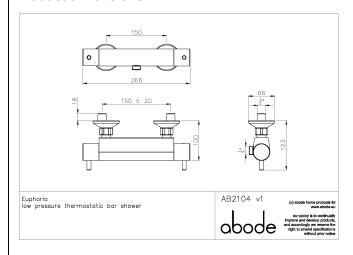

• Overall Height / projection: 100 mm


Exit reach:Exit height:

• Centre distance(s): 150 ± 20 mm

Base diameter(s): 66 mm
Product mounted where: Wall
Recommended hole diameter:
Min. fitting depth required: 60 mm

· Max. surface depth:

## Product flow characteristics:



Min / Max water pressure: 0.20 / 5 bar
Part G mixed flow rate at 3 bar (I/m): 33.7

Max water temperature: 70° C
Product flow characteristics:

Aerator type:

Includes output diverter?: No
Control valve type: Thermostatic ()
Non return valve position: h&c inlet
Mesh particle filter size: 0.60 mm

• Inlet / outlet size: 1/2" M /

• Inlet type / length: Eccentric / 50 mm

• Shower hose type / length:

# Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 2 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

#### Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives