



Product features:

- Metal construction throughout
- Single lever control for effortless single handed control
- Supplied complete with flexible tail pipes for fast simple fitting
- Fixed spout to prevent accidental water damage
- Single spray pattern showerhead


Packaged properties:

Box length: 305 mm **Box depth:** 155 mm
Box width: 235 mm **Boxed weight:** 4.65 kg

Includes pop up waste?: No


Additional comments:
 Includes metal hand shower & 5 x hoses

Product dimensions:

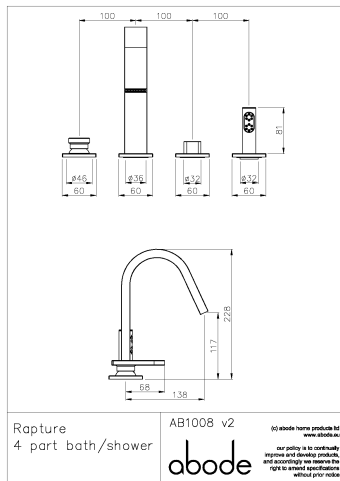

- **Overall Height / projection:** 228 mm
- **Exit reach:** 138 mm
- **Exit height:** 117 mm
- **Centre distance(s):** 100-200 mm
- **Base diameter(s):** 60 mm
- **Product mounted where:** Surface
- **Recommended hole diameter:** Ø 46-52, 36-40, 32-40, 32-46 mm
- **Min. fitting depth required:**
- **Max. surface depth:** 30 mm

Product flow characteristics:

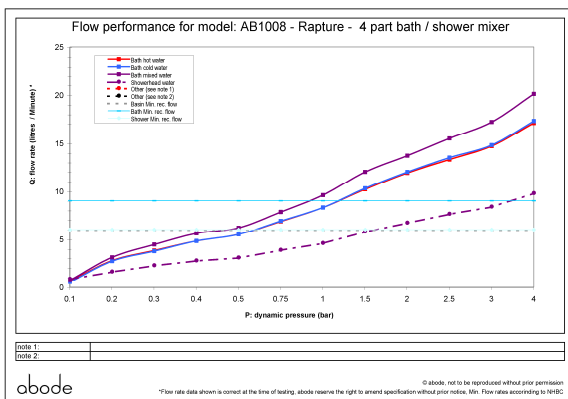

- **Min / Max water pressure:** 1 bath & 1.5 shower / 5 bar
- **Part G mixed flow rate at 3 bar (l/m):** bath=17.2, shower=8.4
- **Max water temperature:** 70° C
- **Product flow characteristics:** Single flow
- **Aerator type:** Grey flow straightener
- **Includes output diverter?:** Yes
- **Control valve type:** Single lever ()
- **Non return valve position:**
- **Mesh particle filter size:**
- **Inlet / outlet size:** 1/2" F / m10
- **Inlet type / length:** Flexible / 420 mm
- **Shower hose type / length:** Grey nylon / 2.00 m

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 2 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives